




EXOTHERMIC SLEEVES FOR

AUTOMATIC SYSTEMS




Rev:20/06-CGL-001



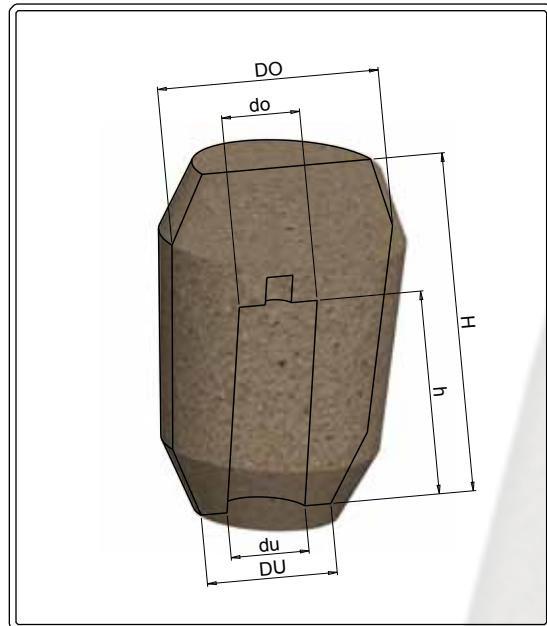

Manufactured with special raw materials, the sleeves have excellent technical characteristics such as pressure and temperature resistance, and heat isolation.

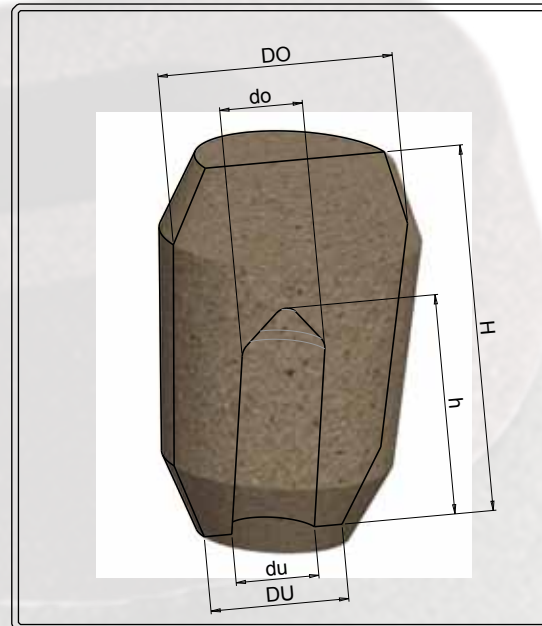

MTV

Type	DIMENSIONS							
	Module	Volume	du	do	Du	Do	h	H
	cm	cm 3	mm	mm	mm	mm	mm	mm
8	0,75	8	16	13	30	50	50	60
16	0,9	16	21	19	38	56	50	62
28	1	28	25	20	40	58	70	83
22	1,2	22	21	18	40	68	70	85
36	1,3	36	25	23	54	76	81	96
38	1,3	38	25	23	42	76	85	100
41	1,3	41	27	24	54	70	85	105
45	1,3	45	25	23	46	56	100	114
56	1,4	56	32	28	60	87	80	97
81	1,4	81	40	37	60	86	70	90
82	1,5	82	36	32	70	83	95	112
88	1,7	88	36	32	60	88	97	108
121	1,9	121	40	35	66	104	110	135
159	2,2	159	50	40	82	114	102	119
238	2,2	238	60	50	90	126	100	125
191	2,5	191	50	40	90	133	120	140
267	2,7	267	65	60	100	120	89	115
276	2,8	276	58	48	100	136	120	140
339	3,2	339	65	55	98	133	122	145
240	3,3	240	45	37	78	140	180	206
415	3,4	415	60	50	110	143	175	200
590	3,6	590	80	75	110	142	125	150
770	4,2	770	80	75	110	170	165	205
780	4,2	780	80	75	128	170	165	205


MTVS

MICROTERMIX MTV / MTVS can be used with cores, which facilitate separation of top nobs (with neck-down cores).


Marking of the neck-down cores:

- BK - STANDARD
- 40BK - THICK

BK

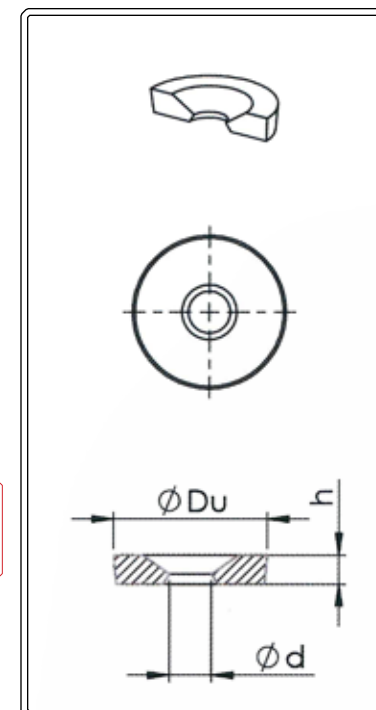

40 BK

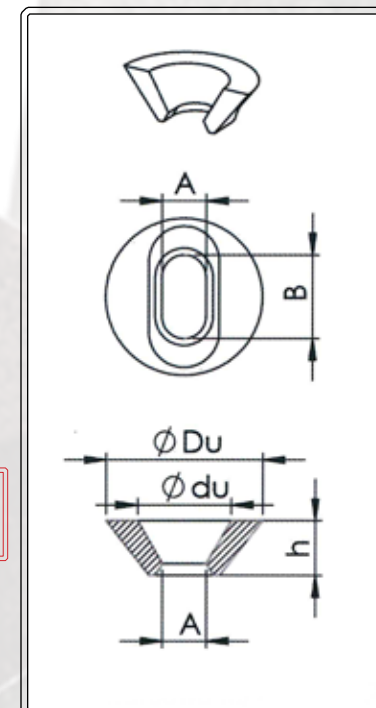

Type	Neck-down core BK		Neck-down core 40 BK	
	d	h	AxB	h
	mm	mm	mm	mm
8	10	7		
16	14	8		
28	15	8	13 x 25	15
22	15	8	13 x 25	15
36	15	12	15 x 25	18
38	15	8	13 x 25	15
41	15	12	15 x 25	18
45	16	8	15 x 25	15
56	17	10	17 x 32	21
81	17	10	17 x 32	20
82	17	15	17 x 32	20
88	17	10	17 x 32	21
121	18	11	17 x 32	20
159	19	11	20 x 40	20
238	21	11	20 x 40	20
191	20	11	20 x 40	20
267	21	11	20 x 40	23
276	21	11	20 x 40	23
339	21	11	25 x 45	23
240	18	15	17 x 34	20
415	25	18	22 x 45	26
590	25	18	22 x 45	26
770	25	18	22 x 45	26
780	28	18	22 x 45	26